


CONNECTION INSTRUCTIONS

1. RED - (Power) Connect to 12 – 28 VDC
2. BROWN - Connect to 0V (GND)
3. Connect WHITE to Power to enable strobing
Strobe Enable is Active High (Active connected to Power)
4. Connect GREEN to YELLOW for synchronised flashing
Leave unconnected for individual flashing
DO NOT connect YELLOW or GREEN to ANY other wires

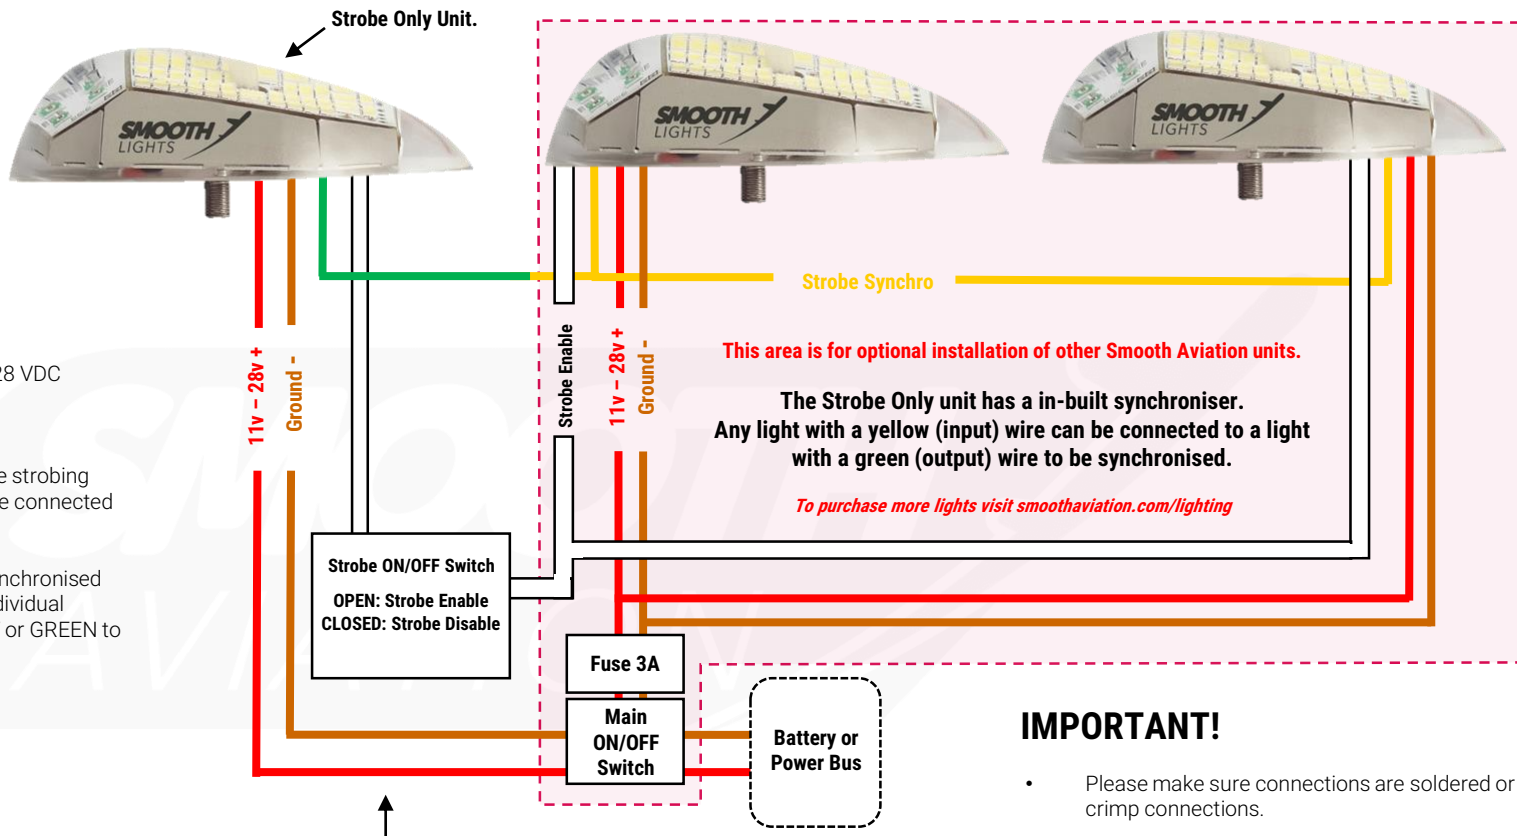

Minimum 18 Gauge Tefzel® wire to be used.

IMPORTANT!

- Please make sure connections are soldered or use crimp connections.
- Insulate wires properly with heat shrink.

PROUDLY MADE IN SOUTH AFRICA BY



ANY QUESTIONS?

Call our office Mon-Fri 8:30-5:30 on (+44) 01743 296406 or our assistance mobile on (+44) 07823 555228.
You can also email us at info@smoothaviation.com